

ROUND 903 - WHITE

LED - BUILDING WASH IP66




Building Washer designad för att ersätta traditionella urladdningsarmaturer. Chassi i formpressad aluminium.

Building Washer designed to be a perfect replacement for the traditional discharge outdoor fixtures.

Die-cast aluminium housing.

Length	385 mm
Height	400 mm
Width	195 mm
Lumen	>17300lm
Power	267W
Input Voltage	AC 100-240V 50/60Hz
Light Source	90 x 3W CREE White LEDs
Kelvin	WW: 2900~3200K CW: 5300-5900K
IP Rating	IP66
Lens Options	6° / 25° / 40° / 60°

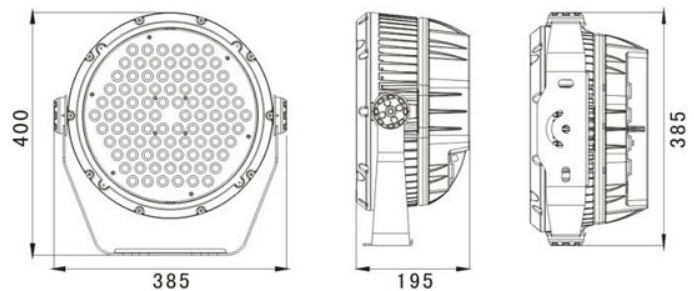

Art	Name	Source	Kelvin	Lens
69-BW-903 WW-6	ROUND 903/White	CREE LED	Warm White	6°
69-BW-903 WW-25	ROUND 903/White	CREE LED	Warm White	25°
69-BW-903 WW-40	ROUND 903/White	CREE LED	Warm White	40°
69-BW-903 WW-60	ROUND 903/White	CREE LED	Warm White	60°
69-BW-903 CW-6	ROUND 903/White	CREE LED	Cold White	6°
69-BW-903 CW-25	ROUND 903/White	CREE LED	Cold White	25°
69-BW-903 CW-40	ROUND 903/White	CREE LED	Cold White	40°
69-BW-903 CW-60	ROUND 903/White	CREE LED	Cold White	60°

Notes:

SWEDLITE